



IMPORTANT INFORMATION: To fully utilize the GJD D-Tect Unit with Texecom Ricochet Monitoring Software, please upgrade your monitoring software via the Texecom website to the Version 2.18.0 or later




GJD850R D-TECT R *Ricochet*[®] Enabled Wireless Installation Manual

Compatible with Premier Elite control panel with firmware V2.08 and above

The D-TECT Ricochet **MUST** be learnt to the control panel **BEFORE** it is mounted in its final location. Please see page 4 of this manual and Premier Elite INS467-5 for details.


1

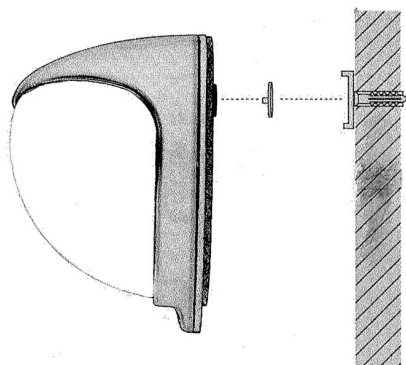


2






3

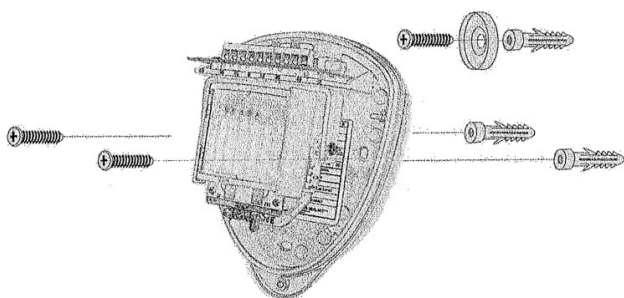

4

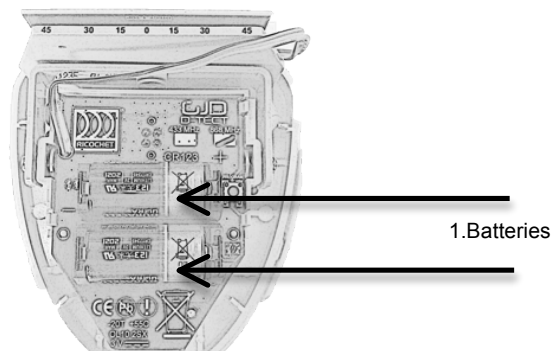

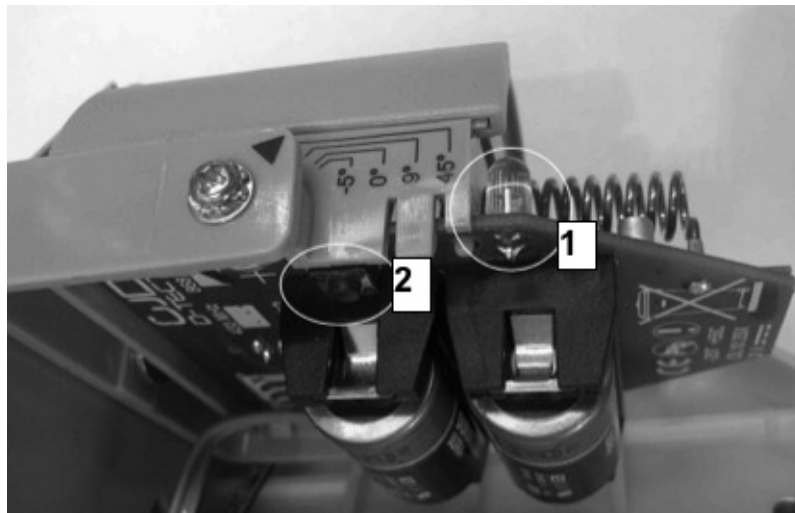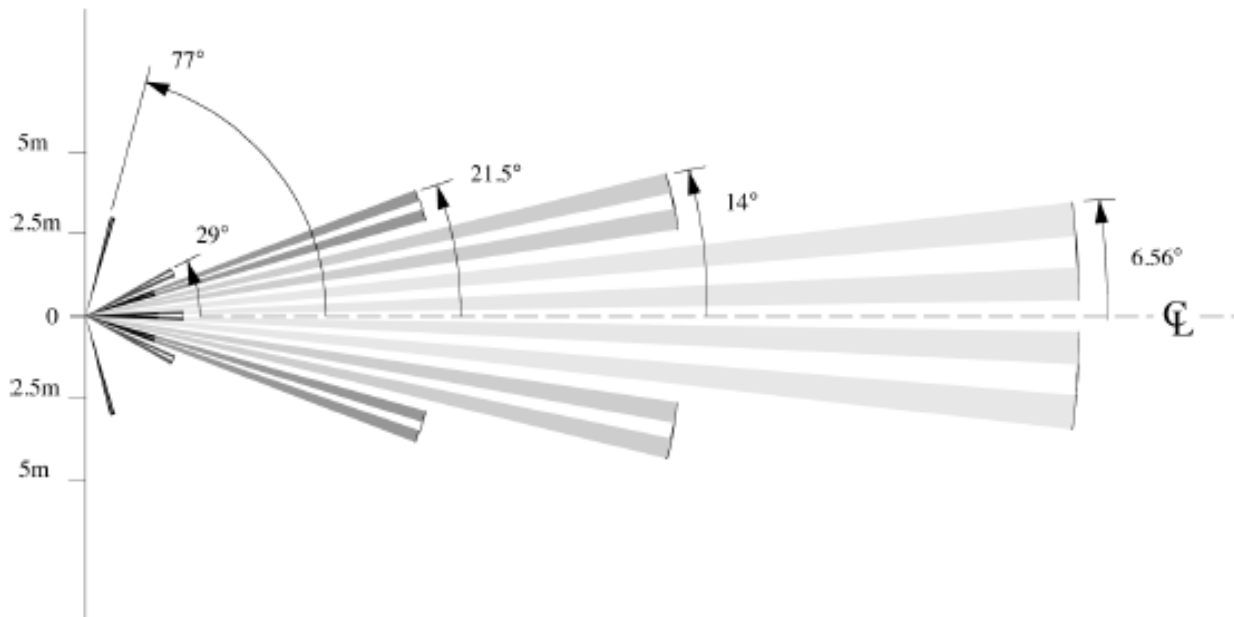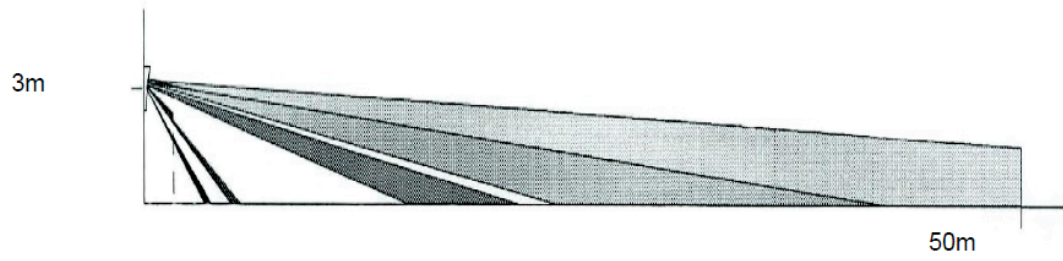

Packaging

The package contains:

- 1x wireless detector
- 3x wall plug & screw sets
- 1x lens mask
- 1x tamper cup
- 2x tamper caps (different lengths)
- 1x plastic opening tool
- 1x installation manual
- 1x drilling template for fixing holes

GJD's Ricochet[®] enabled D-TECT[®]

The wireless detector uses a quad pyro where both sensors must trigger to cause the detector to signal an alarm ensuring precise and reliable presence detection.

Programmable options include a variable pulse count and a choice of detection ranges up to 50 meters.

The dual-axis tilt sensor allows 180° of pan and 90° of tilt. This increases the speed of the outdoor installation and provides accurate aiming of the detection pattern.

Precision electronics, digital white light filtering, and double shielding eliminates false alarms from the sun.

The detector housing has a professional appearance with the sensing module hidden behind the front cover.

Quick installation

1. Place two CR123 batteries into the detector battery holders. Observe the polarity. See figure 4, item 1. The detection LED will flash four times.
2. With the **Ricochet[®]** expander in commission mode enter the learning menu on the control panel. To learn the device follow the instruction given in the control panel documentation.
3. Press and release the programming button once to learn the device. (Fig 10, item 2). This action also activates walk test mode. **Note: The learn process may take up to 10 seconds from pressing the programming button. Learn will be confirmed on the control panel.**
4. The detector will take approximately 3 minutes to settle. The detection LED is now enabled for five minutes.
5. Mount the detector following the instructions below.

Note: To carry out a walk test the zone mode must be programmed to be 'Always Awake' and the front cover must be fitted and secured.

The default settings are:

- Range: 50 meters
- Pulse count: 1

Fitting the detector

Protect the electronics against water. Trapped moisture can affect or damage the unit.

Mounting holes should be sealed from within the detector using acrylic (*non-silicone* based) sealants. **Silicone sealants must not be used as vapours may corrode the electronics and metal parts.**

Ensure the detector's field of view is unobstructed.

Mounting the detector:

1. Drill the wall to accept the fixing screws and the tamper cup (if used). See Figures 1 and 3.

A hole-drilling template is provided.

Notes

- Use the tamper cup on uneven surfaces.
 - The optimum mounting height is 3m. Higher mounting heights will result in reduced detection range and the target will have to move a greater distance within the field of view before an alarm is generated.
2. Remove the cover assembly using the plastic opening tool and by loosening the locking screw. See Figure 2.
 3. Screw the unit to the wall. Ensure the tamper pin is correctly located and the tamper switch is closed.
- Two different length tamper feet are provided for uneven surfaces. The tamper foot is a push-fit see Figure 1.
4. When the detector is aligned, powered and programmed:
 - a. Fit the cover.
 - b. Loosely tighten the locking screw.
 - c. Push the two side plastic latches into the base.
 - d. Tighten the locking screw.

Batteries

Only use CR123 3 V Lithium batteries.

Observe correct polarity when fitting.

Battery safety information

- Do not put in a fire
- Do not charge
- Do not heat
- Do not short circuit
- Do not disassemble
- Only fit batteries of the same type and voltage

To preserve battery life the zone mode must be programmed to be "Auto" which introduces a 3 minute sleeptime.

Beam alignment and masking

The PIR circuitry detects changes in heat and movement in the beam pattern. The presence of trees, shrubs, ponds, boiler flues, black tarmac and animals should be considered when positioning the detector.

PIR sensors are more sensitive to movement across the beams and less sensitive to movement directly towards or away.

Figures 5 & 6 show typical beam patterns.

Programming

Figure 7 shows the position of the programming button (2) and the programming LED (1).

Table 1: Programming settings

Option	1	2	3
1. Range (m)	10	25	50*
2. Pulse count	1*	2	

- Default settings

Pulse count is the number of detections before signalling an alarm. Pulse count 1 is most sensitive.

Changing settings:

1. Press the programming button once for range and twice for pulse count.
2. Wait until the programming LED turns off (typically 4 seconds).
3. Count the number of times the LED flashes to determine the current value for that option.
4. Press the programming button to select the value number for the new setting. E.g. to change the range to 25m, press twice.

The LED blinks twice to indicate that the new value was set.

Programme settings are stored in non-volatile memory.

Resets

1. Remove the batteries.
2. Press and hold the programming button (See Figure 7, item 2).
3. Refit the batteries.
4. After the programming LED has flashed, release the programming button.

Learning to control panels

When the control panel is in learn mode press the detector programme button once. After about 10 seconds the wireless detector will be learnt on to the control panel.

Walk test

In walk test mode, the detection LED option is set to 'ON' and the detection LED will illuminate on detection.

To enter the walk test mode, press the programming button once. The unit can now be aligned.

Walk test mode ends automatically five minutes after the last detection.

Do not conduct walk tests with the cover removed.

The range of the detector increases without the protective front cover. Therefore the front cover must be fitted to establish the correct beam pattern. Adjust the range as necessary. Pan and tilt the detector module over the field of view to obtain the correct coverage.

Specifications

Detection range	Programmable: 10, 25 or 50m
Coverage	50 x 10m. 13° detection angle
Adjustment	180° pan, 90° tilt
Optics	Double silicon shielded quad element eliminates 50,000 Lux of white light
LED	Red alarm
Batteries	2x 3 V CR123
Current	50 µA
Pulse count	1 or 2
Control	Digital micro. with non-volatile memory
Walk test	Output test mode with LED indication
Operating temperature	-25 to +65°C
Housing	High impact ABS plastic with HDPE cover, UV stabilised
Dimensions W x H x D	145 x 145 x 120mm
Weight	268g Net, 425g Gross
Mounting height	Variable up to 4 meters. Optimum 3 meters

Compliance

Manufacturer	GJD Manufacturing Limited, Unit 2, Birch Business Park, Whittle Lane, Heywood, Lancashire, OL10 2SX, UK
Certification	
R&TTE	This device is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Environmental class	IP65
	2002/96/EC (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info .

Contact information

Web: www.gjd.co.uk

Tel: +44(0) 1706 363 998

Email: sales@gjd.co.uk